

INSTALLATION INSTRUCTIONS (ROPE & PULLEY)



All necessary ground anchors, “c”-track at top, eyebolts inserted into the track and hex-head nuts should be preinstalled onto the eyebolts to secure the eyebolts to the track.

Step 1:

Attach pear link to top loops of fabric panel (See photo 1).

Photo 1



Step 2:

Attach shackles to double and single pulleys. (See photo 2).

Photo 2




Step 3:

Fold rope in half and weave 2 pieces of rope through top of the 2 double pulleys on one side of the screen (See photo 3) and do the same with the single pulley on the end. The double pulleys should be approximately 1' apart on the same side of the screen (See photo 4).

Photo 3



Photo 4

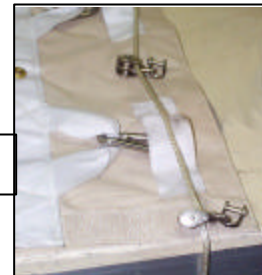

Step 4:

Put 2 knots in the rope at least 12” apart on the side with double pulley and run rope back through double pulley, with the 2 knots hanging on the side with the double pulleys (See photo 5).

Photo 5



Hendee Enterprises, Inc.
The Innovative Solutions Company

9350 South Point Drive
Houston, TX 77054
713-796-2322
www.hendee.com

Step 5:

Pull left side of rope under roller tube or flat bar (See photo 6) and attach to grommet by pulling rope through the grommet and tying a knot behind the screen (See photo 7). The grommets are placed on the panel in front of the single and double pulley toward the center of the panel. The grommets are placed on the panel at least 2'-0" from each end of the screen (A dimension).

Photo 6



Photo 7



Step 8:

Pull right side of rope under flat bar or roller tube and back through the grommet and tie a knot behind the screen.

Step 9:

Then attach pear links and shackles to the eyebolts that are connected to the "c" track at top.

Photo 8

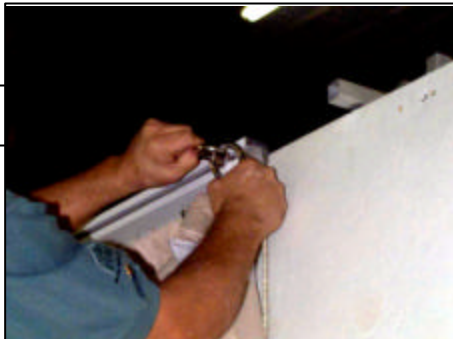


Photo 9

